



Combo Valve for LPG Vessels No 6078

Technical sales Specification.

The Bullfinch Combination Valve number 6078 is suitable for installation into bulk LPG vessels, the valve combines the fill, liquid offtake, vapour offtake and fixed liquid level gauge functions.

Performance characteristics:

Average liquid fill rate: 130 I/min.
Average liquid empty rate: 62.5 I/min.
Average vapour flow rate: 21m³/hour

The service life of the valve is 20 years and the following parts that can be replaced due to damage or wear are as follows:~


Liquid Fill Connection Cap SP 6078 F
Liquid Offtake Connection Cap SP 6078 G
Fixed Liquid Level Gauge SP 6078 H
Note: No other part can be changed in the field.

The valve is suitable for reconditioning; this should only be carried out by a company approved by Bullfinch (Gas Equipment) Limited.

Eduction tubes and Dip tubes are available for various vessel sizes.

The Combo Valve number 6078 meets the requirements of the Pressure Equipment Directive No. 2001 – 1999.

The valve has been manufactured and tested using sound engineering practices in accordance with the requirements of BS EN 13175 – 2003.

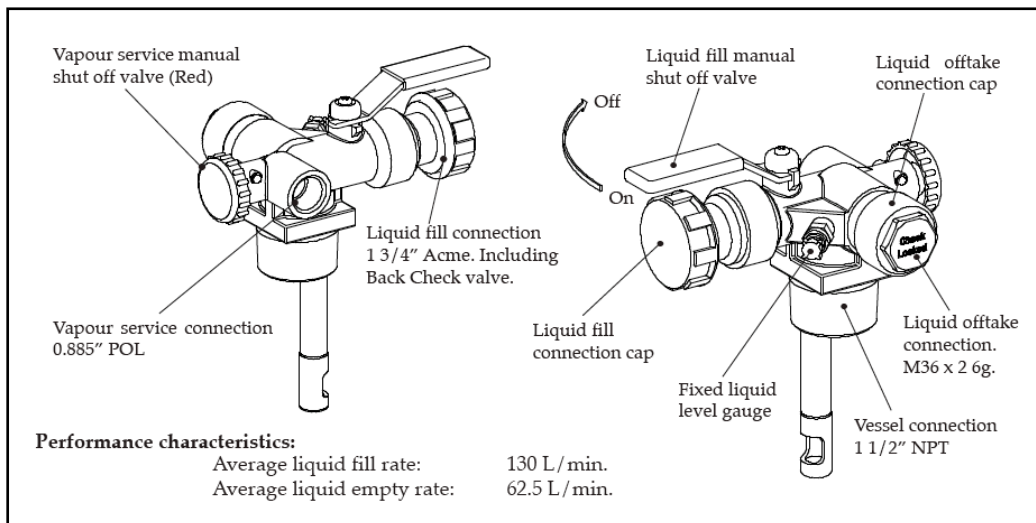

For further information contact the sales department at:

Bullfinch (Gas Equipment) Limited, Diadem Works, Kings Road, Tyseley, Birmingham B11 2AJ
England, UK Tel: 0121 765 2000 (Int +44 121 765 2000) Fax: 0121 707 0995 (Int +44 121 707 0995)
e-mail: sales@bullfinch-gas.co.uk web: www.bullfinch-gas.co.uk

Copyright - © 2011